



Logan Smith
October 08, 2025 1:35 PM



Logan Smith
October 08, 2025 1:35 PM

Johns Manville Continuous Insulation (CI) is as specified by the local building code with regard to the use of a suitable thermal barrier.

CODE COMPLIANCE:
 ICC-ESR-3389, CCIMC 13104.1
 AP Foil-Faced Polyiso Continuous Insulation complies with the following standards and model codes when properly installed:


Seal and Insulate with ENERGY STAR
 LEARN MORE AT energystar.gov

Thickness (in)	R-Value (ft ² ·°F·h/BTU)	Thickness (mm)	RSI Value (K·m ² /W)	Design LTTR (K·m ² /W)
0.50	2.7	13	0.48	0.48
0.62	3.5	16	0.62	0.61
0.75	5.0	19	0.88	0.83
1.00	6.0	25	1.06	1.02
1.20	7.5	31	1.32	1.26
1.50	9.3	38	1.63	1.57
1.65	10	42	1.82	1.74

WARNING: Johns Manville AP Foil-Faced Polyiso Continuous Insulation is combustible and shall only be used in accordance with the applicable fire classification.
PRECAUCION: El aislamiento de Johns Manville AP Foil-Faced Polyiso Continuous Insulation es combustible y debe utilizarse de acuerdo con la clasificación de fuego requerida.

RSI-Value (K·m ² /W)	Design LTTR (K·m ² /W)
0.48	0.48
0.62	
0.88	
1.06	
1.32	
1.63	

- | | |
|---|---|
| 1 | 2 |
| 3 | 4 |
| 5 | 6 |
| 7 | 8 |

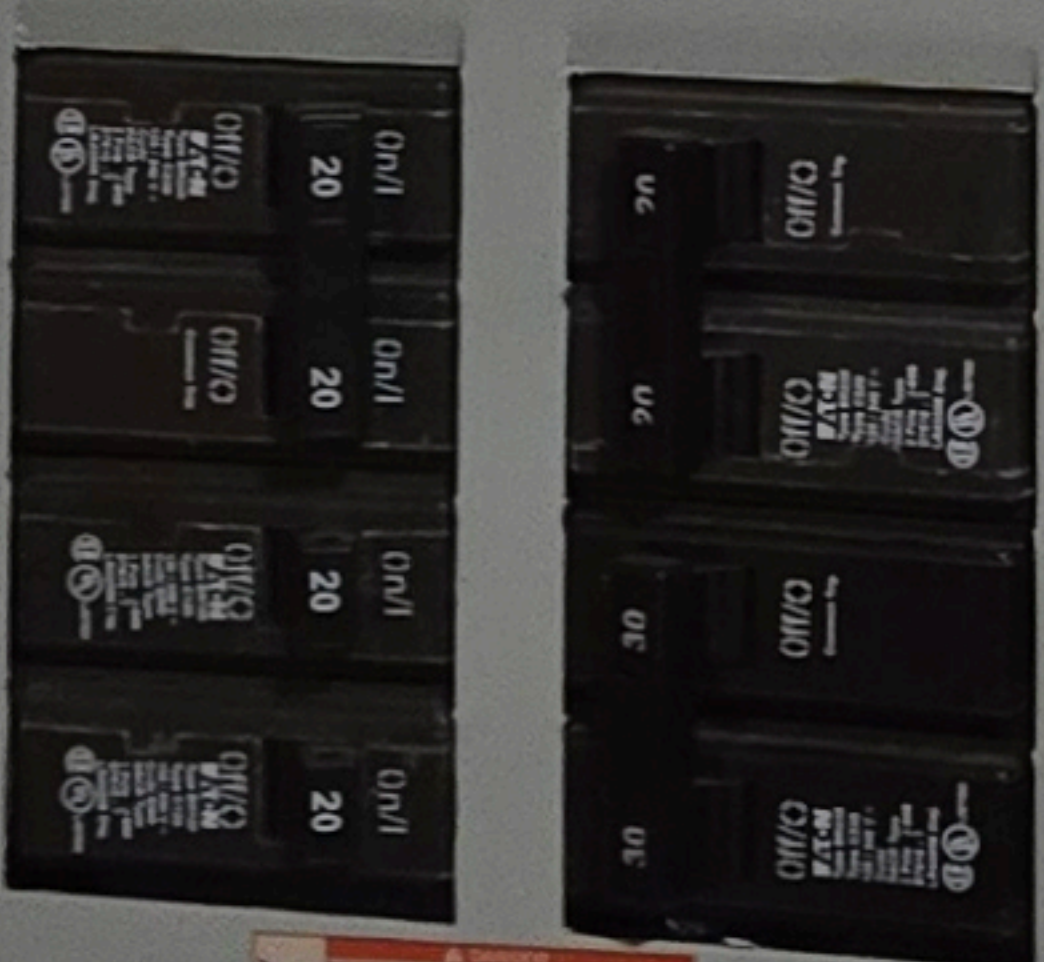

Johns Manville Insulation
 Denver, CO 80202 • 1-800-554-3103
 Johns Manville. All Rights Reserved.

Logan Smith
 October 08, 2025 1:35 PM



Logan Smith

October 08, 2025 1:36 PM





Logan Smith

October 08, 2025 1:39 PM



Logan Smith
October 08, 2025 1:39 PM



Logan Smith
October 08, 2025 1:43 PM